



BD-388III

BD-388III Series

Laser-Like Linear Imager scanner is even Simpler

More Powerfully More Easily

The Enhanced, Upgraded and More Powerful scanner supports Auto Sensor



1. Excellent value for popular barcode reading

With the rapidly growing and wide application for barcode symbology application, Birch released the enhanced linear imager scanner which offers laser-like and high performance barcode reading: 500 scans/second, 400mm scanning distance for all of barcode reading including EAN 128 code and GS1 data bar.

2. Multiple 4-in-1 interface in one scanner

BD-388III is built with Keyboard, RS232 USB and Wand interface. It supports use replaceable interface cable by RJ45 phone jack; different interface can be interchangeable just by changing cable. It is simplified installation and integration and good to lessen your inventory load.

It supports to connect RS232 interface directly to your PC by Pin 9 with 5V power without external power adapter.

3. User Friendly and PnP design

The Intuitive scanning and plug and play design can be used directly with your computer without additional device. BD-388III is enhanced with Auto Sensor function for hand-free operation to lengthen the optical life. Furthermore, the ergonomic and gun type design body offers maximum comfort for every day use.

4. Built with professional decoder

BD-388III is built with enhanced scan rate and faster decoding (increased 20% more speed) ability. It supports USB downloading/ uploading and re-set functions.



Ordering Information:

BD-388IIIM: Linear long range scanner, PS/2 cable, Black or Beige

BS-388IIIR: Linear long range scanner, RS-232 cable, Black or Beige

BS-388IIIU: Linear long range scanner, USB cable, Black or Beige

HDR-5P: High stand/hand free holder, Black or Beige

Technical Specifications


Model	BD-388III series
Optical	
Light Source	635 nm
Sensor	Linear CCD Sensor
Processor	ARM Cortex –M3, 32 bit
Scanning Speed	500 scans/sec ±10%
Depth of Field	400mm @ 20mil, PCS 90%
Ambient Light	10,000 Lux Max. @ Direct sun light
Reading Performance	
Symbologies	All UPC/EAN/JAN, EAN128 Code, Code 39, Code 39 Full ASCII, Code32 / Italian Pharmacy, Code 128, CODABAR/NW7, Interleave 25, Industrial 25, Matrix 25, MSI/PLESSEY, Telepen, Code 93, Code 11, China Postage, Code 26, LCD25, GS1 DataBar
Resolution	4mil @ PCS90%
PSC	45% @ 5mil

Electrical	
Interface	RS232, KB, USB
Connector	RJ 45C 10Pins
Voltage	DC +5V ±5%
Operating Current	165 – 175mA
Standby Current	50mA
Environment	
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	20% to 95% (Non-condensing)
Physical	
Material	ABS Plastic & Rubber
Weight	Approx 130g
Dimension	193 x 90 x 85(mm)
Durability	
Drop test	120cm (47inch) Drop on Concrete Surface
Life Time	Light Source: 40,000 hours; Trigger Switch: 1,000,000 times; MTBF: 80,000 hours

PIN ASSIGNMENTS


Decoder Data Output (Type RJ45 10P)

Pin No.	Function
1	RTS
2	HOST DATA
3	GND
4	HOST CLK
5	Vcc (+5V)
6	KB CLK
7	TXD
8	KB DATA
9	RXD
10	CTS




RS-232 interface

DB 9 Female	
Pin No.	Function
2	TXD
3	RXD
5	GND
7	CTS
8	RTS
9	Vcc/+5V
Power Lead	Vcc/+5V





Keyboard interface

Mini DIN 6 MALE		Mini DIN 6 FEMAL	
Pin No.	Function	Pin No.	Function
1	HOST DATA	1	KB DATA
3	GND	3	GND
4	Vcc (+5V)	4	Vcc (+5V)
5	HOST CLK	5	KB CLK



USB interface

USB A Type Male	
Pin No.	Function
1	Vcc
2	D-
3	D+
4	GND

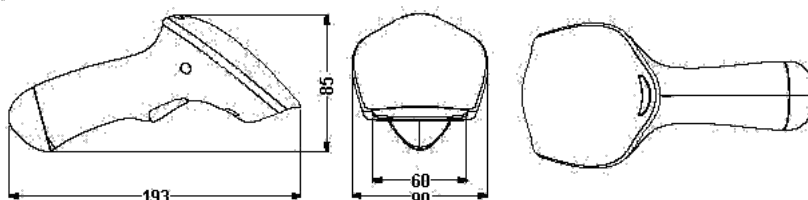

Contact us for details


BIRCH TECHNOLOGY INC

Birch is a trademark of Birch Technology U.S.A. Inc
All other products, brands or companies are trademarks or registered trademarks of their respective companies.
Specifications are subject to change without prior notice